

Cinemas • Simultaneous Interpretation • Audio Description • Conferences • Multi-Media Rooms
Boardrooms • Courtrooms • Schools • Universities • Churches

WIR SYS 91V

SoundPlus® Two-channel Infrared System



The TX90 two-channel IR transmitter combines modulator and emitter technology into a single operating unit, which reduces operating cost, eliminates the need for rack space and eases set-up. The TX90 transmitter produces a wide-angle infrared signal that concentrates the IR energy efficiently in the listening area. Operating on the 2.3-3.8 MHz bandwidth, the TX90 is less susceptible to radio and lighting interference. Each TX90 transmitter can cover up to 28,000 sq ft (2,600 sq m) in single-channel operation with WIR RX22-4N receivers. (The coverage area can be easily increased by connecting additional TX9 emitters). This system features our stylish **NEW** WIR RX15-2 headset-style, infrared receivers. A wall/ceiling omnidirectional mount is included, and stand kits are available for portable operation.

System includes:


- (1) WIR TX90 infrared transmitter
- (3) WIR RX15-2 infrared receivers
- (1) WIR RX22-4 infrared receiver
- (1) NKL 001 neckloop
- (1) HED 021 headphone

SoundPlus® Two Channel Infrared System

WIR TX90 Transmitter:

Dimensions, Weight:	11.25" W x 6.25" H x 2.125" D (28.6 cm x 15.9 cm x 5.4 cm), 1.8 lbs (0.8 kg)
Color:	Black with white legends, black acrylic lens
Power Supply:	Wall Transformer, 24 VAC, 50-60 Hz, 35 VA, 3-pin MOLEX Connector
	North America: TFP 010, UL/CSA
	Europe: TFP 027-01, 2-pin Schuko plug, CE
	UK: TFP 027-02, 3-pin UK plug, CE
Power Cable:	NEC Class 2 wiring, two-conductor, 18 ga., 200' (61m) max. length
Modulation:	FM Wideband, +50kHz deviation max., 50uS pre-emphasis
Carrier Frequency:	Channel A: Selectable, 2.3/2.8 MHz, Channel B: Selectable, 3.3/3.8 MHz
Emitter IR Power:	3.5 watts
Coverage Area:	28,000 sq. ft. (2600 sq. m) in single channel mode when using the RX22-4 Receiver 18,000 sq. ft (1700 sq. m) in two channel mode when using the RX22-4 Receiver 11,000 sq. ft (1000 sq. m) in four channel mode when using the RX22-4 Receiver 3,500 sq. ft (325 sq. m) in single channel mode when using the RX15-2 Receiver 3,063 sq. ft (285 sq. m) in single channel mode when using the RX18 Receiver
Signal-to-Noise Ratio:	>75 dB, +3dB
Frequency Response:	80 to 15,000 Hz, electrical response
Total Harmonic Distortion:	Less than .2%, electrical response at 1kHz
Compression:	Music preset 1:1, Voice preset 1.5:1, Hearing Assist preset 2:1
Auto Carrier Shut-Off:	20 minute timer shuts off carrier when no audio is present
Warranty:	Five years*

TX90 Bottom View:

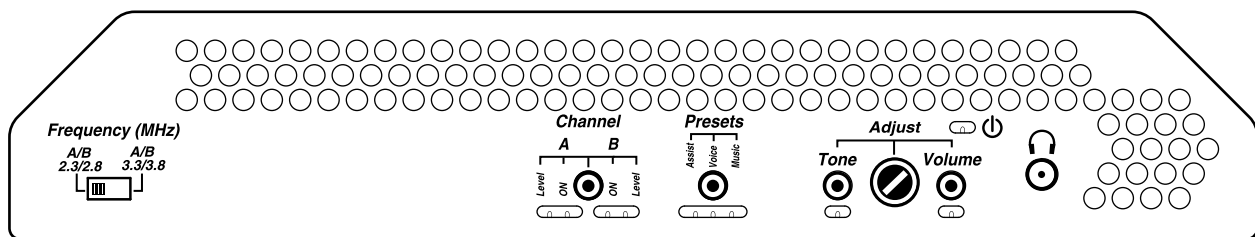

A222


Power Indicator:	Red LED
Audio Volume Level Controls:	CHA and CHB Input Level, press to select, 28 dB adjustable range
Audio Indicators:	CHA and CHB Audio Level, yellow LED, flash
Carrier LEDs:	2 green LED carrier "on" indicators
Phones Output:	3.5mm TRS headphone jack. CH A tip, CH B ring on jack, 32 ohm headphone (min)
Application Preset:	Music, Voice, Hearing Assist. Frequency response; Music: Flat; Voice: Mid-range boost; Hearing Assist: High frequency boost
Tone Control:	Press to select, 21 dB adjustable range (1 kHz between low boost/hi-cut and low cut/hi boost).

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!

***90 Days on Accessories**

SoundPlus® Two Channel Infrared System

Fig 2: TX90 Rear View

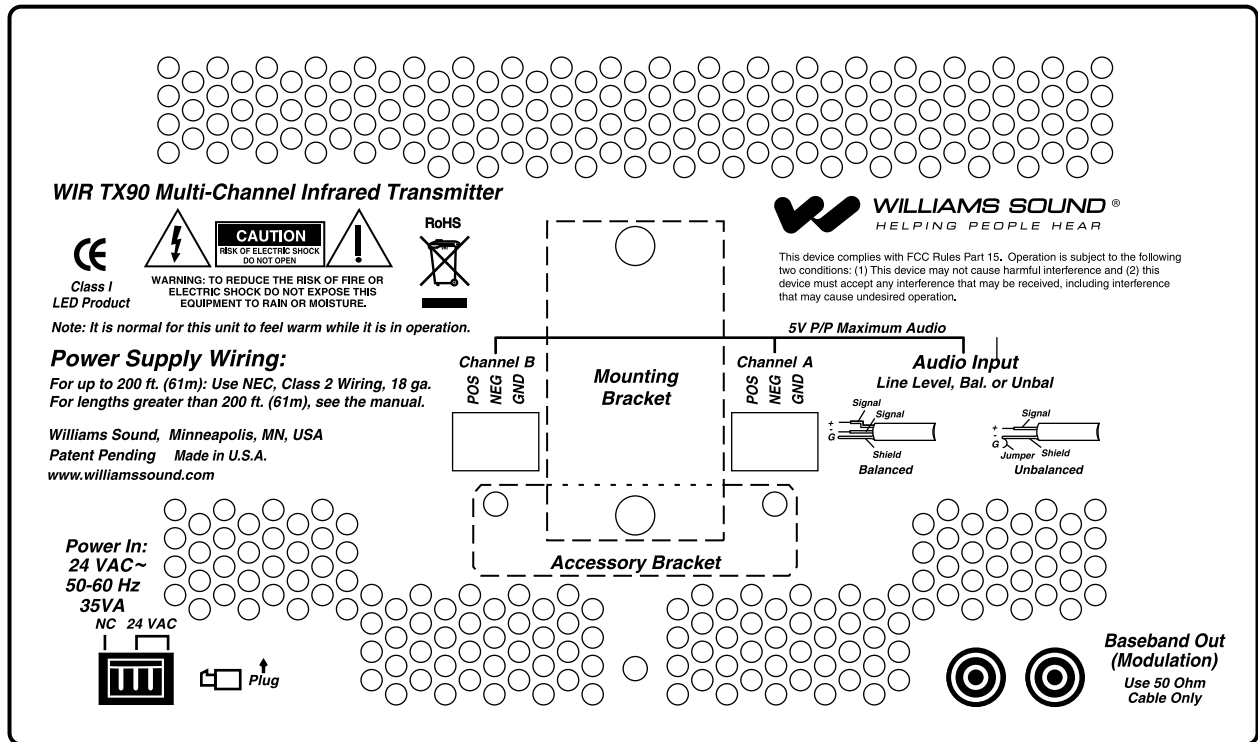


A221

Power Input:	3-Pin Molex, 24 VAC, 50-60 Hz, 35 VA
Audio Input Connector:	CHA and CHB, 3 wire Phoenix
Input Level:	Balanced or unbalanced, 316 mVRMS (-10dBV) nominal, 5.7k input impedance; max input (over volume range) -21 to +7 dBV.
Baseband Output:	BNC, 50 Ω, for use with TX9 only
Baseband Cable:	RG 58 Coax, BNC connectors, maximum 1000' (300m) length
Operating Requirements:	0-50° C (+32°F to 122°F) ambient temperature, non-condensing, non-corrosive atmosphere
Mounting Kits:	Wall or Ceiling Mount: BKT 024 Omnidirectional mount; Optional: Tripod Stands: SS-11 or SS-6
Warranty:	5 years on transmitter, 90 days on accessories
Approvals:	CE, FCC, RoHS, WEEE
Compatible Receivers:	WIR RX22-4 Four-Channel Receiver, WIR RX15-2 Two-Channel Receiver, WIR RX18 Two-Channel Receiver
Notes:	Specifications: Single end input, volume & tone controls at mid point, 1 kHz, "Music" Preset

SoundPlus® Two Channel Infrared System

Receiver Coverage Area with TX90 Transmitter in Single Channel Mode

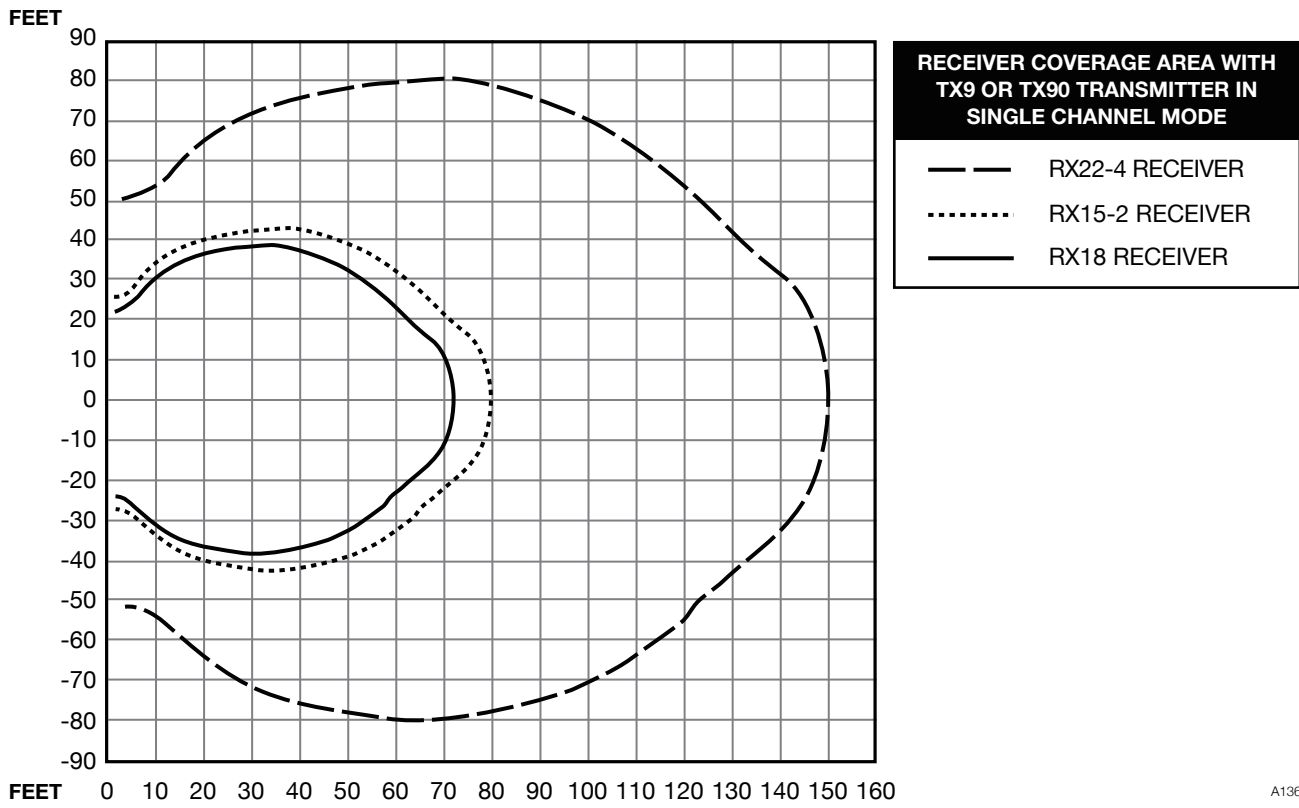

A136


The coverage area for the TX90 will vary depending on the receiver being used. The diagram above demonstrates the receiver coverage when operating a single TX90 transmitter in single channel mode. Patterns are direct radiation patterns.

Note: Reflections of the infrared light from walls, ceilings and floors may change these patterns.


SoundPlus® Two Channel Infrared System

WIR RX22-4 Receiver:

RX22-4 TOP

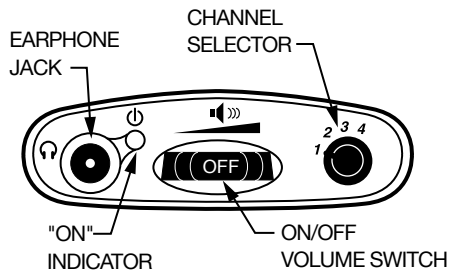

RX22-4 FRONT

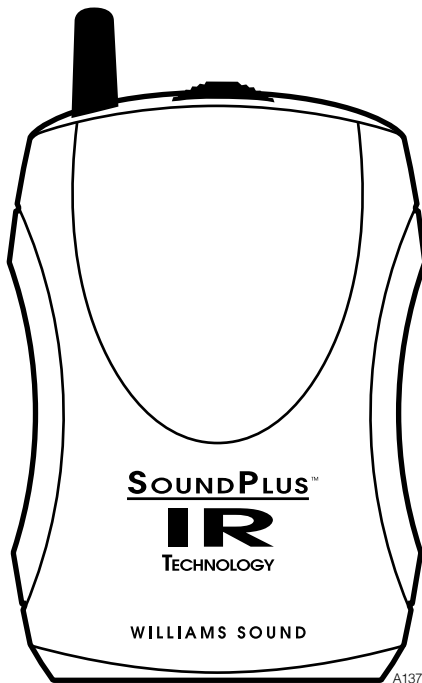

Receiver Style:	Body-Pack, dual-lens detector, lanyard
Size:	4.5" L x 2.85" W x 1.2" H (114.3 mm x 72.4 mm x 30.4 mm)
Weight:	4.6 oz (130 g) with batteries
Color and Material:	Black
Lanyard:	3 ft (.91 m), allows receiver to be worn around the neck
Operating Temperature:	-10° C to +50° C
Battery Type:	2 x AA, alkaline (BAT 001) or NIMH (BAT 026)
Battery Life:	Alkaline: 60 hours, NIMH: 30 hours/charge
Battery Drain:	25 mA, nominal
Charging Contacts:	For use only with CHG 3512
Carrier Frequency:	Channel 1: 2.3 MHz, Channel 2: 2.8 MHz Channel 3: 3.3 MHz, Channel 4: 3.8 MHz
De-Emphasis:	50 uS
FM Deviation:	±50 kHz
Signal-to-Noise Ratio:	60dB min.
Squelch:	Receiver squelches (mutes) at 40 dB S/N ratio
Frequency Response:	25 Hz to 16 KHz, +1 dB, -3 dB, electrical response
Total Harmonic Distortion:	Less than 1%, electrical response
Controls:	ON/OFF/VOLUME: combination thumbwheel knob Channel Selector: four-position rotary switch
Indicators:	Red LED "ON" indicator, flashes to indicate Low battery
Audio Output Jacks:	3.5 mm stereo mini phone jack Accepts 3.5 mm mono or stereo phone plug
Audio Output Power:	15 mW max at 32 Ω
Acoustic Output:	110 dB SSPL90 w/ EAR 013
Sensitivity:	Better than 1 nW/cm ² for 40 dB signal-to-noise ratio
Approvals:	CE, FCC, RoHS, WEEE
Warranty:	5 years on receiver, 90 days on accessories
Compatible Headphones/ Earphones:	Mono or stereo, 8-32 ohms, 3.5 mm mini phone plug, HED 021, HED 026, EAR 013, EAR 014, EAR 022, NKL 001


***DISCLAIMER: FCC RULES LIMIT USE OF THIS EQUIPMENT TO AUDITORY ASSISTANCE**

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!

SoundPlus® Two Channel Infrared System

WIR RX15-2 Receiver:

Receiver Style:	Headset
Earpad Size:	2.5" (6.5 cm) diameter, adjustable headband
Weight:	5.5 oz (155g) without batteries
Color and Material:	Black, plastic
Operating Range:	Up to 3,500 ft2 (325 m2) when using a single WIR TX9 Emitter
Battery Type:	AAA Alkaline batteries (BAT 010)
Battery Life:	Alkaline: 80 hours
Battery Drain:	12 mA, nominal
Controls:	ON/OFF switch (2) Thumbwheel volume control knob, left and right (1) Frequency slide-button selector, 2.3 MHz or 2.8 MHz Monitor button = mutes audio
Indicator:	LED - Power: RED = 2.3 MHz; GREEN = 2.8 MHz
Frequency Response:	30 Hz – 20 kHz
Signal-to-Noise Ratio:	60 dB (IEC weighted)
Magnetic Field Strength:	1.9 A/M 9per CFR 68.316)
Deviation:	FM wideband modulation
Acoustic Output:	118 dB MAX SSPL90, +/- 1 dB with 6 cc coupler
Approvals:	CE, RoHS, WEEE
Warranty:	2-year warranty (excludes physical damage)*

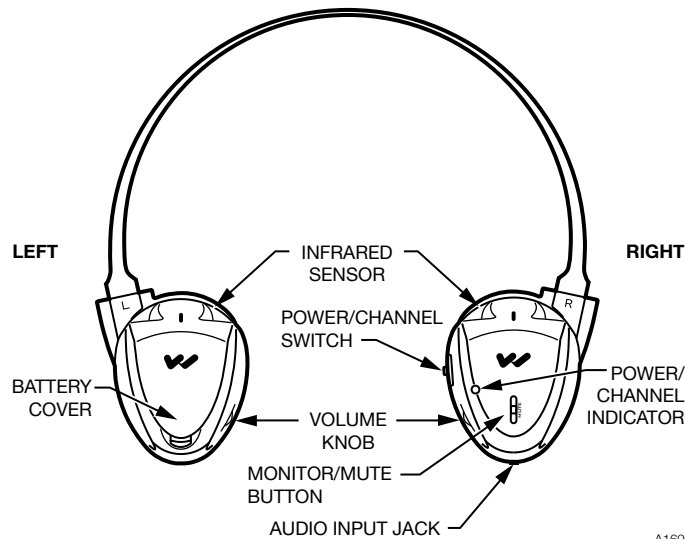

A169

SoundPlus® Two Channel Infrared System

Bid Specs

WIR TX90 Transmitter

The Williams Sound Corp. WIR TX90 transmitter shall consist of an all-in-one modulator and emitter operating on switchable carrier frequencies of 2.3/2.8 MHz or 3.3/3.8 MHz. The carrier frequency shall use 50 kHz deviation and 50µs pre-emphasis.

The transmitter shall have a range of 28,000 ft² (2,600 m²) in single channel mode when using the RX22-4 receiver. The transmitter shall be contained in a metal housing with a durable plastic lens. The transmitter shall be convection cooled without fans. The transmitter shall include an omni-directional mounting bracket for permanent installations. Additional brackets shall be available for different mounting options.

The transmitter shall provide two channels of selectable carrier frequencies: CH A 2.3/2.8 MHz or CH B 3.3/3.8 MHz. Two transmitters used in tandem shall provide up to 4 simultaneous channels.

The transmitter shall have two Phoenix connectors on the back for balanced or unbalanced line input. All controls and indicators shall be accessible on the bottom of the panel of the transmitter.

The transmitter shall have three application presets: Music, Hearing Assistance and Voice accessible by thumbscrew adjuster.

There shall be a 3.5mm stereo headphone jack for monitoring the processed audio before being transmitted.

Two BNC (50Ω) baseband output jacks shall be provided on the back panel for more coverage needs. The TX9 emitter panels must be used with the TX90 transmitter via RG58 coax cable.

The transmitter shall be powered by an external 24VAC, 50-60 Hz, 35VA power supply. The power connector shall be a three pin Molex type. Additional emitters shall require individual external power supplies.

The transmitter shall be covered by a five-year warranty on parts and labor. The transmitter shall be the Williams Sound model WIR TX90

WIR RX22-4 Receiver

The receiver shall be a body-pack type with IR detector lens behind face of the unit. The unit shall have a lanyard for hands-free operation. The receiver shall have a rotary-type volume control. The receiver shall operate for 60 hours with two AA alkaline batteries and for 30 hours per charge with NiMH AA batteries. The receiver shall be charged without battery removal via charger contacts in the case. A drop-in charger accessory shall recharge the batteries in 8 hours when used with CHG 3512 charger. The receiver shall be housed in an impact resistant plastic case with a hinged battery door that does not separate from the receiver. The receiver shall receive 2.3 MHz, 2.8 MHz, 3.3 MHz or 3.8 MHz modulated IR signals with 50 µS de-emphasis. The receiver shall have a 3.5 mm stereo phone jack and accommodate low-impedance mono or stereo earphones and headphones. The receiver shall accommodate neckloop telecoil couplers. The receivers shall provide 110 dB SSPL90 output with EAR 013 earbud-type earphone.

The system electrical frequency response shall be 25 Hz to 16 kHz, +1, -3 dB and the signal-to-noise ratio shall be 60 dB. The receiver shall have CE, FCC, RoHS, and WEEE approval. The receiver shall be covered by a five-year parts and labor warranty, excluding earphones, headphones, batteries and chargers.

The receiver shall be the Williams Sound model WIR RX22-4.

Receiver, Model WIR RX15-2

The receiver shall be a headset style with IR detectors positioned on top of each individual earphone. The receiver shall operate on 2.3 MHz or 2.8 MHz frequency. The receiver shall have an individual rotary-type volume control on each individual earphone and a on/off selection switch on the right earphone. The receiver shall have a slide-button frequency selector to choose between 2.3 MHz or 2.8 MHz operation. The receiver shall provide 118 dB SSPL90 output, +/- 1 dB, and a signal-to-noise ratio of 60 dB. The receiver shall operate up to 80 hours when using AAA alkaline non-rechargeable batteries. The receiver shall be encased in a black, plastic case. The receiver shall operate up to 3,500 ft² (325 m²) when using a single WIR TX9 Emitter. The receiver shall have CE, RoHS, and WEEE approval and be covered by a two-year parts and labor warranty, not including batteries or accessories.*

The receiver shall be the Williams Sound model WIR RX15-2.

***DISCLAIMER: FCC RULES LIMIT USE OF THIS EQUIPMENT TO AUDITORY ASSISTANCE**

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!

Domestic Sales

Williams Sound
10300 Valley View Rd
Eden Prairie, MN 55344
Ph: 800-328-6190 / 952-943-2252
FAX: 952-943-2174
Email: info@williamssound.com
Web: www.williamssound.com

International Sales

International Sales Department
Williams Sound
10300 Valley View Rd
Eden Prairie, MN 55344 USA
Phone: +1 952 943 2252
Fax: +1 952 943 2174
Email: info@williamssound.com
Web: www.williamssound.com



WILLIAMS SOUND®
HELPING PEOPLE HEAR

800.843.3544 / info@williamssound.com / www.williamssound.com