

PFM T36

Motiva™ PFM Transmitter





The Motiva™ PFM T36 transmitter will broadcast a speaker's voice on one of sixteen available channels, 72-76 MHz, to listeners using a R33, R35, R35-8, R36, R37 or R1600 receiver. The unit features flexible mic and auxiliary inputs, push-button on/off/mute controls, channel lock and selectable compression. Lightweight and portable, the PPA T36 will operate up to 150 feet (46 m) from the listening audience. It is ideal for providing hearing assistance for students in the classroom, tour group participants, employee training, business meetings and more.

For order information on the PFM T36, contact Williams Sound at 800-843-3544.

Motiva™ PFM Transmitter

PFM T36 FM Transmitter:

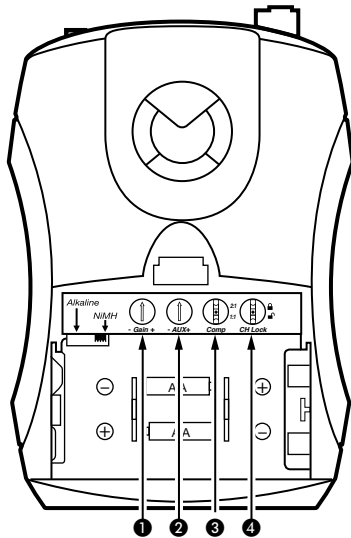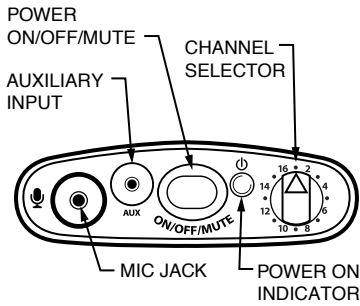

- 1 GAIN CONTROL
- 2 AUXILIARY INPUT LEVEL
- 3 COMPRESSION SELECTOR
- 4 CHANNEL LOCK

A207

Dimensions:	4.1" L x 2.8" W x 1.1" H (104 mm x 71 mm x 28 mm)
Weight:	2.6 oz (74 g), no batteries
Color:	Titanium and Black
Housing Material:	Shatter-resistant PC/ABS plastic
Battery Type:	Two (2) AA 1.5 V non-rechargeable Alkaline batteries (BAT 001), 70 mA nominal current drain, 30 hours approx. life or Two (2) AA 1.5 V NiMH rechargeable batteries (BAT 026), 70 mA nominal current drain, 20 hours per charge approx., recharges in 14-16 hours, uses CHG 3502 or CHG 3512 Charger
Operating Frequencies:	Selectable, 16 channels, 72.1 – 75.9 MHz* (channels 1-8 correspond with R35-8 receiver channels)
Stability:	± .005%, frequency synthesized, crystal reference, PLL
Modulation:	Wide-band FM, 75 kHz pk, 75 μS pre-emphasis
RF Output:	80 mV/m at 3 m (max. allowed by FCC rules)
Freq Response:	200 Hz to 13 kHz, ± 3 dB at 1% max. THD
Signal-to-Noise Ratio:	65 dB (typical) transmitted
Transmit Antenna:	Integral with microphone cord
Microphone:	Electret type, 3.5 mm mono phone plug
External Controls:	Momentary push button: push and hold 3 seconds for power On/Off, push and release for microphone mute On/Off; Rotary sixteen channel switch (with internal channel lock switch)
Mic Input:	3.5 mm mono phone jack with electret mic bias, internal adjustable master gain with 25 dB range
Aux Input:	2.5 mm stereo phone jack, internal adjustable gain with 60 dB range
Audio Compression:	1:1 or 2:1 ratio selected with internal slide switch
Compatible Receivers:	PFM R33, PFM R36, PPA R37, PPA R35-8, PPA R1600
Approvals/Directives:	FCC, Industry Canada, RoHS, WEEE
Warranty:	5 years, parts and labor (90 days on accessories)

Motiva™ PFM Transmitter

Bid Specs:

The PFM T36 is a wide band body-pack transmitter and shall operate on 16 selectable frequencies between 72MHz and 76MHz. It shall operate for up to 30 hrs with two AA Alkaline batteries and shall be housed in a titanium colored PC/ABS plastic enclosure. The T36 shall have a 3.5 mm microphone jack and a 2.5 mm auxiliary audio input jack. The T36 shall have access to channel select, compression on/off, channel lock, master gain and aux gain inside the battery compartment. There shall be a power switch which also serves as a microphone mute control on the top bezel of the transmitter.

The T36 shall have wide band modulation at 75KHz peak with a frequency response of 200Hz to 16KHz. The transmitting antenna shall be integrated into the 40 inch microphone cable.

The PFM T36 shall be covered under a five year parts and labor warranty. This transmitter shall be the Williams Sound PFM T36.

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!

Domestic Sales

Williams Sound
10300 Valley View Rd.
Eden Prairie, MN 55344
Ph: 800-328-6190 / 952-943-2252
FAX: 952-943-2174
Email: info@williamssound.com
Web: www.williamssound.com

International Sales

International Sales Department
Williams Sound
10300 Valley View Rd.
Eden Prairie, MN 55344 USA
Phone: +1 952 943 2252
Fax: +1 952 943 2174
Email: info@williamssound.com
Web: www.williamssound.com



800.843.3544 / info@williamssound.com / www.williamssound.com